easy mobile

GO EASY, GO MOBILE.

WIRELESS CHARGER SMART LAMP

USER MANUAL

MAIN FEATURES & TECHNICAL PARAMETERS

- Power supply: input AC 100-240V 50/60Hz, output DC13V/1.2A
- Rated working current: 1.2A
- Rated consumption power: 18W
- Lighting rated power: 8W
- Rated ambient temperature: 40℃
- Dimmer: sensor touch key and stepless dimming
- Timer: smart timing shutdown
- Light source: 40 pcs of LEDs
- Light mode: Natural—White—Yellow light
- Color temperature: 2700-6500K
- CRI: Ra≥90
- Max illuminance: ≥1000LUX(measured 33CM from lamp shade to desk）
- Wireless charging output: 5V/1A(MAX)

OPERATING INSTRUCTION

1. Turn on the lamp: put the lamp on table positively, connect the adapter, short press the "⏻" symbol to turn on the lamp, the default for open the lamp is natural light. Short press again to shut down the light. Short touch press "M" to switch light mode circularly: natural—white—yellow.

2. Lamp brightness: extended press "⏻" to adjust the brightness.

3. Timer: when light turned on, extended press "🕒" to turn on the timer function in any circumstance, at the same time the light flashes 2 times, then lamp would shut down in 40mins(a period of one lesson). Timer function would reset if you extended press "🕒" again. Lamp will shut down automatically until count down is over.

WIRELESS CHARGING INSTRUCTION

1- Wireless charging function: when lamp power supply is on, putting a mobile phone which with wireless receiver function(or a mobile phone with wireless charging receiver module)

on the desk lamp of wireless charging icon in the center area, observing the power icon on the phone, such as display is charging, explain the phone has been in a state of wireless charging. Meanwhile, wireless charging indicator turns to green.

2- For the best use effect of wireless charging function, to get higher charging efficiency, please pay attention to wireless receiving position of mobile phone, it should be fully exposed to wireless charging icon on the surface of the desk lamp and in the central area. If don't exposed fully on the icon, the green indicator light will flash. When devices fully power charged, green and red indicator will be on at the same time.

3- Light and wireless charging functions can be used at the same time.

CAUTIONS

1. This product power is supplied by adapter DC13V/1.2A. If the adapter or cable is damaged, please ask the manufacturer, agent or any qualified people for help.
2. This product shall be used indoor only.
3. While the LED light on, do not shine on eyes in short distance to prevent eye injury.
4. This product might be turned on or off under strong electromagnetic wave.
5. Part of the lamp pole is not available to bend, otherwise it might be damaged. Please do not bend the silicone part so often in case it might be damaged.
6. The light source of this lamp cannot be replaced, when the light source servers to its end, should replace the whole lamp.
7. This product may tip over when used on a table with a slope greater than 6°.

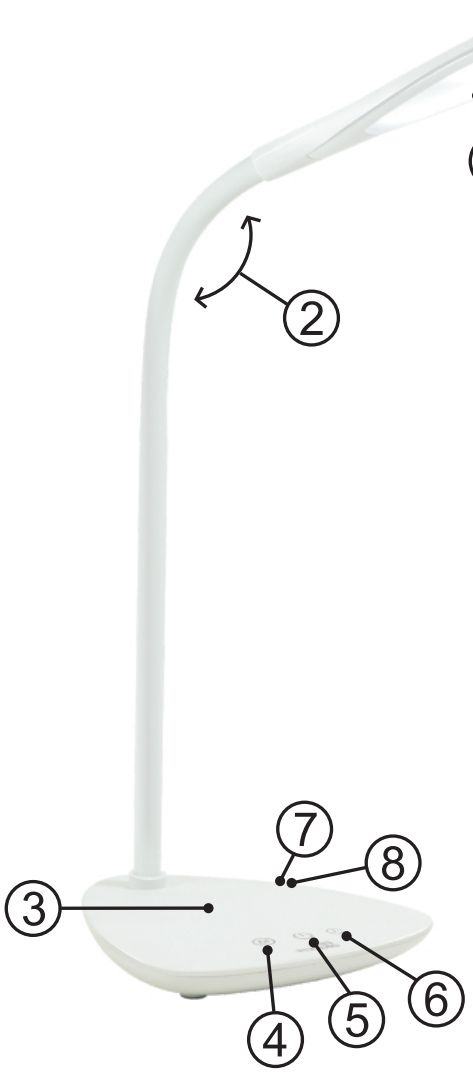

BUTTONS AND FUNCTIONS

1 - Lamp cap
2 - Height adjustment
3 - Wireless area
4 - Light mode button
5 - On / Off Button
6 - Lamp shutting down key
7 - Power input - DC 13V
8 - Charge indicator light loading.

Package contains:
- Adapter
- User manual

easy mobile
GO EASY, GO MOBILE.

easym.com.br
/easymobile.br
@easy.mobile

Product support:
E-mail: **support@easym.com.br**